

APV-22

AMCA

HYDRAULIC
CONTROLS



Features.

- * Modular assembly system, suitable for 'Build Program'.
- * Max. operating pressure 420 bar.
- * Different spooltypes up to 330 l/min. in combination with simultaneously control.
- * Compact sandwich design, suitable for mobile applications.
- * Several inlet plate types available for different types of pumps.
- * Operating control in any combination (electrical, manual and hydraulic).
- * Adjustable P for setting the maximum flow.
- * Several user relief options as primary-, shock-, suction- and remote control functions.
- * One full flat surface for mounting in any position.
- * Standard seawater resistant


TECHNICAL DATA

Max. flow :	port P1 or P2	320 l/min *
	port P1 + P2	660 l/min
	Combiplate port P1 or P2 (22)	320 l/min
	Combiplate port P1 + P2 (22)	660 l/min
	port A/B	330 l/min
	port A/B without compensator	380 l/min
Max. pressure:	port P/A/B	420 bar
	port T	35 bar
Pressure setting range		13-420 bar Manual operating 20-420 bar Electrical operating
Nominal pressure drop over 2-way compensator (A,B)		7 bar
Internal pilot pressure supply		28 bar
Pilot pressure for electrical and hydraulic control		6-20 bar
Spool stroke		7 mm
Spool overlap (dead band)		1,45 mm (21% of the spool stroke)
Fluid		Mineral oil according to DIN 51524/51525 - 30 ... + 80°C
Fluid temperature range		- 30 ... + 80°C
Viscosity range		10 ... 500 cSt, optimal 30cSt
Contamination level max		According to NAS 1638 Class 8 or ISO 4406: 18/16/13
Mounting position		Optional
Connections		
Port P	BSP	SAE ORB
Port T	G1 1/4"	20
Port A/B	G1 1/2"	24
Port LS	G1 1/4"	20
Port L	G1/4"	6
Port Ya,Yb	G1/4"	6
Electrical connections		AMP Junior Power Timer
Electrical		
Nominal voltage		12 VDC or 24 VDC
Nominal current		12 VDC = 1300 mA 24 VDC = 650 mA
Coil resistance		12 VDC = $5.3 \pm 5\% \Omega$ 24 VDC = $21.2 \pm 5\% \Omega$
Recommended dither frequency		100 Hz
Type of protection		IP 65
Duty cycle		100%
Hysteresis		3%

* Pumpflow, see note page 16

Different flowtypes:
(with compensator)

Flow P → A/B

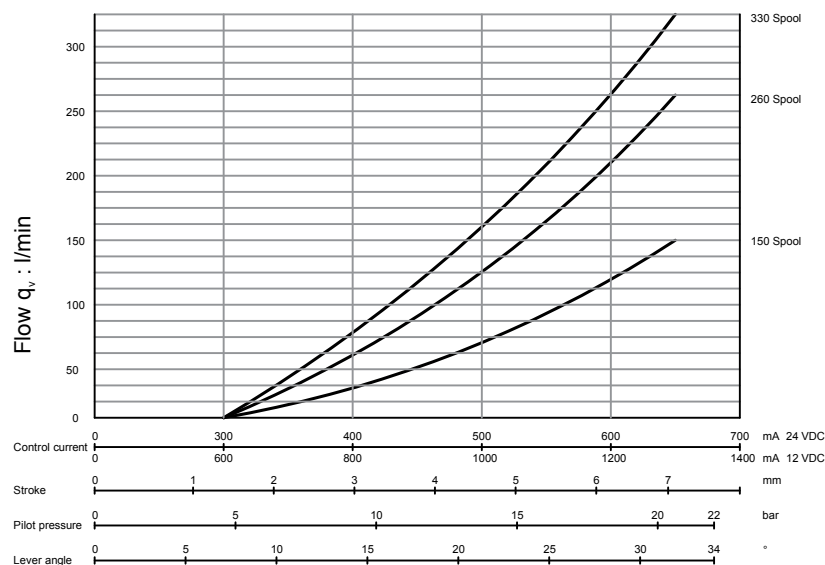

TECHNICAL DATA

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code

Technical information.

The unique modularity of the APV enables system solutions for manufacturers of mobile machines, as a wide range of functions can be integrated/changed by the customer in an easy, flexible and cost-effective way.

Inlet Plate.

Inlet plates are available for fixed and variable displacement pumps, and constant pressure networks.

Functions as:

- anti-saturation;
- pump unloading;
- pressure relief;
- LS signal amplifier and combinations thereof; can be integrated into the inlet plate.

Control Valve.

The control valve consists of spool section and connection block.

Spool Section.

The main advantage of the APV-series is the standardization of the spool section. Different types of spools and control methods are available. Up to 10 control valves, with or without a 2-way compensator can be stacked. For perfect system stability the 2-way compensator can be equipped with a damping function. Check valve function is also available within this compensator. Stroke limitation per port and Δp -setting per section is standard.

Connection Block.

A very wide range of optional functions can be delivered using several, easy to mount, low cost, connection blocks. Besides a basic connection block, optimized customization can be achieved by the following functions:

- remote controlled pressure setting/unloading per port;
- adjustable secondary pressure setting per port;
- suction valves and shock/suction valves per port;
- adjustable primary port relief per port with excellent relieving characteristic.

Any other special functions can be easily integrated into special connection blocks on request.

End Plate.

Also the end plates for different control methods can be equipped with optional functions as:

- additional P-port;
- Z-port to enable a LS-cascade with another valve;
- feeding point for hydraulic joysticks.

Safety.

To comply with national and international safety regulations, special safety functions can be integrated as described above.

Serviceability.

The modular concept (build-program) improved the servicing of the APV.

All orifices and shuttle valves are directly attainable from the outside of the valves.

Symbols and Terminology.


Graphic symbols in accordance with ISO1219-1.

Identification of valve ports in accordance with ISO 9461.


For the purposes of this document, the definitions and terminology given in ISO 5598 and the following definitions apply:

- LS : load sensing
- Primary relief : relief function in the flow line, e.g. the 3-way compensator in the inlet plate and the shock/suction valve in the connection block.
- Secondary relief : relief function in the signal line, e.g. max. load pressure relief in the inlet plate.


Inlet plate

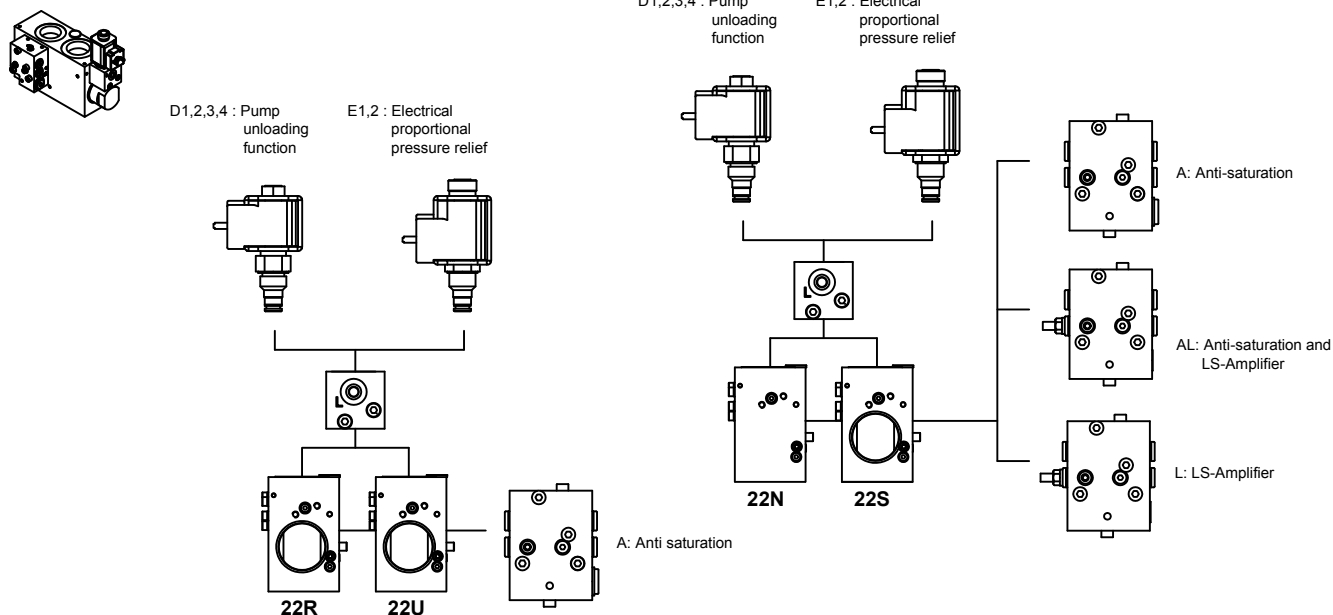


Connection block (Some possibilities)

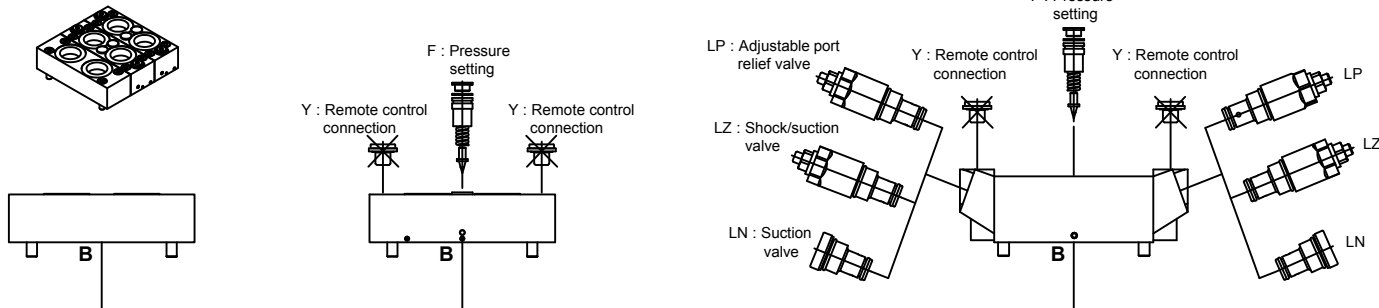


Spool section

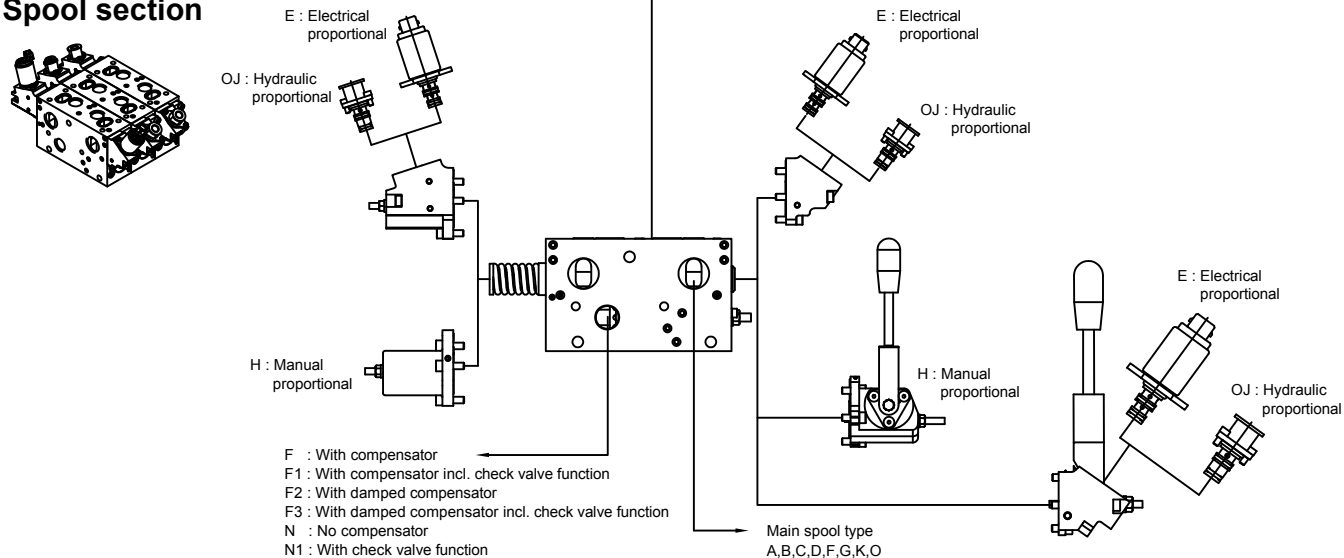

End plate

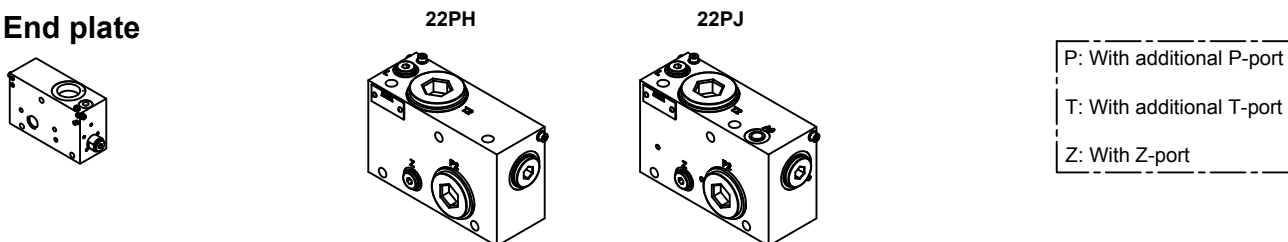

Example:

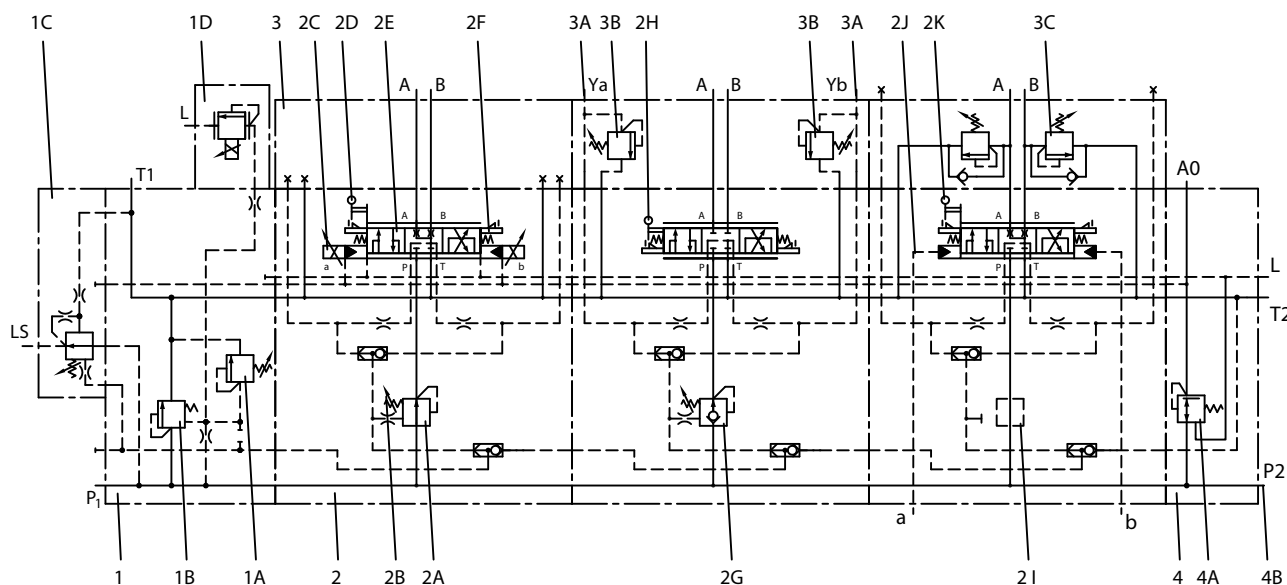

Pos. Description:

- 1 **Inlet plate**, several types available for different types of pumps
- 1A Adjustable load pressure relief, standard on all types of inlet plate
- 1B Pump relief function
- 1C LS amplifier, for strong signal and perfect stability of the LS-pump
- 1D Electrical proportional pressure relief

- 2 **Spool section**, basic section for different main spool types and compensator variants
- 2A 2-way compensator for load-independent control and simultaneously operation
- 2B Flow adjustment by regulating the pressure drop across the main spool
- 2C Control method: Electrical proportional
- 2D Additional manual control
- 2E Main spool type
- 2F Adjustable stroke limitation for adjusting the max. flow per port
- 2G As 2A, with check valve to P-line
- 2H Control method: Manual proportional
- 2I No 2-way compensator per section
- 2J Control method: Hydraulic Proportional
- 2K Additional manual control

- 3 **Connection block**, separate block for all different types of options
- 3A Remote control connection on port A and B (optional)
- 3B Adjustable pressure setting on port A and B (optional)
- 3C Shock/Suction valves port A and B (optional)

- 4 **End plate**
- 4A Pressure reducing valve, for electrical control
- 4B Additional pump connection (optional)

INLET PLATE

INLET PLATE

For every pump type an inlet plate is available:



Fixed displacement pump

The APV inlet plate version 22U, fig. 1, is designed for fixed displacement pumps.

The main relief in this section is functioning as a 3-way compensator.

If none of the control sections are in operation, the inlet plate version 22U creates about 14 bar in the pump line. Actuating one of the control sections, the specific load pressure is added as signal to the spring chamber. Actuating more control sections at the same time, the highest load pressure will be added.


The load signal pressure is also controlled by the max. load pressure relief.

This relief can be adjusted (14 ... 420 bar).

To feed also another circuit, an inlet plate 22R is available.

(see application examples).

Fig.1



22U420B

Variable displacement pump (LS-pump)


The APV inlet plate versions 22N and 22S are designed for this pump type.

The version 22N, fig. 2, has the function as inlet block for P, T and LS (load sense line). The load sense signal from the valve block can be adjusted, up to 420 bar, with the relief valve.

Version 22S, fig. 3, has an overpressure safety function.


The relief valve can be adjusted to max. pump line pressure and the relief spool reduces the overpressure by relieving the pump flow to tank.

Fig.2



22N420B

Fig.3



22S420B

Pressure compensated pumps / Constant pressure networks


The APV inlet plate version 22N, fig. 2, is also designed for pressure compensated pumps and constant pressure networks.

It has the function as inlet block for P, T. The LS connection G1/4" has to be blocked.

The load signal pressure is controlled by the max. load pressure relief.


The max. load pressure of the valve block can be adjusted (up to 420 bar).

Fig.1A




22U420B

Fig.2A



22N420B

Fig.3A



22S420B

INLET PLATE

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code


Additional functions for all types of pumps:

Anti-saturation function, code A, fig. 4

The anti-saturation function is developed for electrical and hydraulic controlled valves.

If the valve block has insufficient pumpflow, the user flow for every control section will be reduced with this function so that every control section keeps working simultaneously.

Fig.4

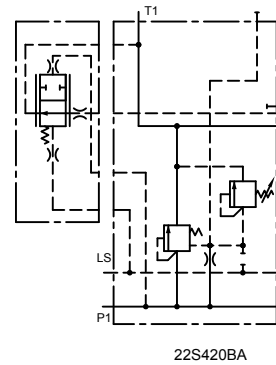

Electrical proportional pressure relief, code E, fig. 5

For remote control of the maximum pressure of the valve block, the electrical proportional pressure relief is available in 12 VDC and 24 VDC.

Pump unloading function, code D, fig. 6

For emergency stop function the load pressure signal from the control sections can be unloaded directly to tank.


The electrical control is available in 12 VDC and 24 VDC with 2/2-way cartridge in normal-open or normal-closed configuration.

The example shows a normal-open configuration.

Please note that the recirculation pressure or stand-by pressure is still on the P-line.

Fig.5

Fig.6

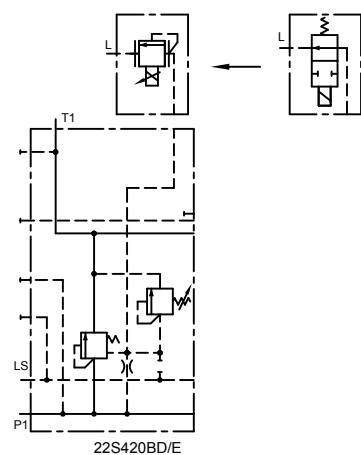

Additional function for LS pumps:

LS Amplifier, code L, fig. 7

This option enables increasing the LS pressure signal if some LS-pumps have a continuous leak of the load-pressure signal to tank.

This option can also be used for fine-tuning of the stability of the pump and the proportional control.

With the adjustment screw the stand-by pressure of the LS-pump is adjustable within 4 bar.

Fig.7

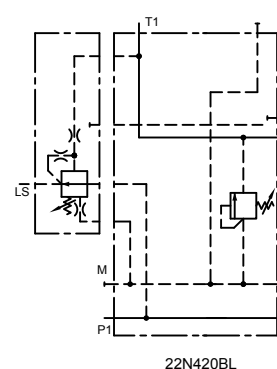


Fig.4A



Fig.5A



Fig.7A



INLET PLATE

COMBI INLET PLATE

If different flows are needed, for example 250 and 75 l/min or less, a combination plate is available to connect the series APV-16 to the series APV-22. This is the most cheapest and flexible way for a compact combination of proportional directional control valves. The combiplate is available for modelnumber 22N, 22S, 22U and 22R.

Fixed displacement pump

The APV combi inlet plate version 22U/C, fig. 1, is designed for fixed displacement pumps. The main relief in this section is functioning as a 3-way compensator.


If none of the control sections are in operation, the inlet plate version 22U/C creates about 14 bar in the pumpline. Actuating one of the control sections, the specific load pressure is added as signal to the spring chamber. Actuating more control sections at the same time, the highest load pressure will be added.

The load signal pressure is also controlled by the max. load pressure relief.

This relief can be adjusted (14 ... 420 bar).

To feed also another circuit, an inlet plate 22R is available.

Fig.1

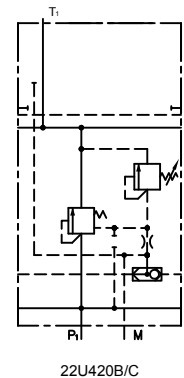

Variable displacement pump (LS-pump)

The APV combi inlet plate versions 22N/C and 22S/C are designed for this pump type.

The version 22N/C, fig. 2, has the function as inlet block for P, T and LS (load sense line). The load sense signal from the valveblock can be adjusted, up to 420 bar, with the relief valve.

Version 22S/C, fig. 3, has an overpressure safety function.

The relief valve can be adjusted to max. pumpline pressure and the relief spool reduces the overpressure by relieving the pumpflow to tank.

Fig.2


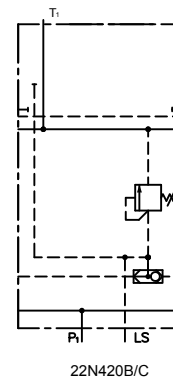


Fig.3

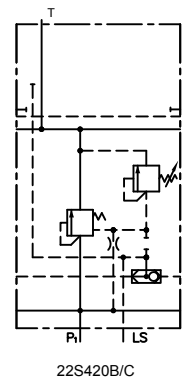

Pressure compensated pumps / Constant pressure networks


The APV combi inlet plate version 22N/C, fig. 2, is also designed for pressure compensated pumps and constant pressure networks.

It has the function as inletblock for P, T. The LS connection G1/4" (SAE 6) has to be blocked.

The load signal pressure is controlled by the max. load pressure relief.


The max. load pressure of the valve block can be adjusted (up to 420 bar).

Fig.1A




22U420B/C

Fig.2A



22N420B/C

Fig.3A



22S420B/C

INLET PLATE

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code


Additional functions for all types of pumps:

Anti-saturation function, code A, fig. 4

The anti-saturation function is developed for electrical and hydraulic controlled valves.

If the valve block has insufficient pumpflow, the user flow for every control section will be reduced with this function so that every control section keeps working simultaneously.

Fig.4

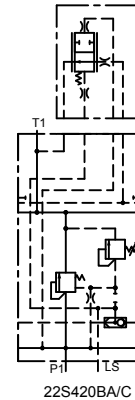

22S420BA/C

Electrical proportional pressure relief, code E, fig. 5

For remote control of the maximum pressure of the valve block, the electrical proportional pressure relief is available in 12 VDC and 24 VDC.

Pump unloading function, code D, fig. 6

For emergency stop function the load pressure signal from the control sections can be unloaded directly to tank.


The electrical control is available in 12 VDC and 24 VDC with 2/2-way cartridge in normal-open or normal-closed configuration.

The example shows a normal-open configuration.

Please note that the recirculation pressure or stand-by pressure is still on the P-line.

Fig.5

Fig.6

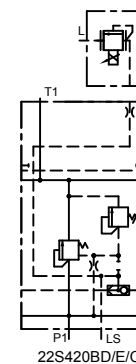

22S420BD/E/C

Additional function for LS pumps:


LS Amplifier, code L, fig. 7

This option enables increasing the LS pressure signal if some LS-pumps have a continuous leak of the load-pressure signal to tank.

This option can also be used for fine-tuning of the stability of the pump and the proportional control.

With the adjustment screw the stand-by pressure of the LS-pump is adjustable within 4 bar.

Fig.7

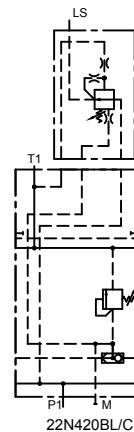

22N420BL/C

Fig.4A



Fig.5A




Fig.7A



CONTROL VALVE

CONTROL VALVE.


On the basis of the build-program principles the APV-22 control valve consists of I standardized spool section and II basic or customized connection blocks and spring- and endcaps. Max. 10 control sections.



I Spool section:

- 1 Compensator types;
- 2 Control method : electrical, hydraulic and manual control;
- 3 Spool types;
- 4 Flow per port.

Fig.8

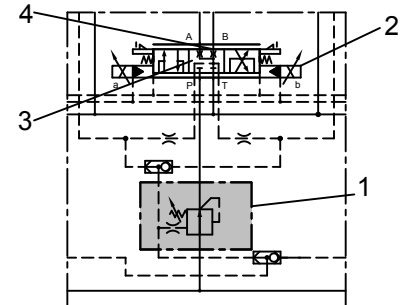


1. Compensator types :


The various compensators enable load independent flow control and possibility of simultaneous operation. The max. flow can be pre-adjusted by adjusting the compensator spring. At part 1 from fig. 8 the following types can be mounted:

Code:


F: 2-way compensator




F1: 2-way compensator with load-hold check valve



F2: 2-way compensator with damping function.




F3: 2-way compensator with load-hold check valve and damping function.




N: Without compensator.

*Note: Max. flow depends on stand-by pressure setting in case of using LS-pump



N1: Load-hold check valve.

*Note: Max. flow depends on stand-by pressure setting in case of using LS-pump



CONTROL VALVE

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code

2. Control method :



E = electrical control



H = manual control




OJ = hydraulic control

The electrical- and hydraulic control can be configured in combination with an additional manual control. All the control methods are standard equipped with stroke limiters for separate fine-tuning the flow of A and/or B port. The cartridge cavity in the end-caps is suitable for all three control methods.

E: electrical control:

The reducing cartridge is integrated within the proportional solenoid 24 VDC or 12 VDC. All the control sections have a pilot supply pressure and return line, which must be fed through the end plate type 22PE. The 22PE end plate is equipped with a separate "L"-connection to drain the pilot return line to tank, which creates a perfect system stability.



H: manual control:

If the handle is not actuated, the spring assembly keeps the spool in neutral position (code HF). The manual control can be configured with detent or friction brake. Detent (code HR): the spool can be set in any position, the center position and both end positions are perceptible. Friction brake (code HB): the spool can be set in any position, the center position is perceptible.



OJ: hydraulic control:

For hydraulic remote control, the endcaps have G1/4" connections.



3. Spool types .

The spool is available for different types of users, like single and double acting cylinders and hydraulic motors.

Code:	Symbol:	Remark	Code:	Symbol:	Remark
A		In neutral position all ports blocked	F		In neutral position all ports blocked
B		In neutral position port A throttled flow to T (approx.20% of nominal flow)	G		In neutral position port A+B throttled flow to T (approx.20% of nominal flow)
C		In neutral position port A+B throttled flow to T (approx.20% of nominal flow)	K		In neutral position all ports blocked, A port blended *
D		In neutral position port B throttled flow to T (approx.20% of nominal flow)	O		In neutral position all ports blocked, B port blended *

* Port is blended with stop in the connection block

4. Flow per port .

Each user port can be set at different flow. The flow with compensator is up to 330 l/min. By adjusting the compensator spring (Δp adjustment) the flow of A and B port can be pre-adjusted. By using the stroke limiters the flow of A and/or B port can be adjusted separately.

CONTROL VALVE

II Connection block.

The main flexibility of APV series is realized by various connection blocks with a very wide range of optional functions. The connection block is the only part to be customized in order to meet special requirements.

The available connection blocks are:

- 1 - basic version only with A and B ports
- 2 - version with secondary safety functions
- 3 - version with primary and secondary safety functions
- 4 - customized versions



The code of the connection block has to start with the type of the thread of the connection port (1 1/4" BSP or SAE 20). The other threads are on request.

1. Basic version:

The basic version is a connection block with only A and B ports.

code:

- B: The connection A and B port is 1 1/4" BSP.
S: The connection A and B port is SAE 20




xxxxx-B
xxxxx-S

2. Version with secondary safety functions:

The version with secondary safety functions is a connection block with possibility of two secondary safety functions. Secondary safety functions are active at the load pressure signal lines, so overpressure (reached maximum load pressure) causes a small amount of oil from the load sense signal vented to tank at maximum pressure. This in contrast with the primary relief valves, whereby the full userflow has to be vented to tank at maximum pressure. Secondary reliefs are only in function if the control valve is actuated.

Code:

- F: Adjustable pressure setting on port A and B:
Each user port can be set with a separate maximum load pressure relief. (LS-relief)
Factory pressure setting (first A-port then B-port) has to be mentioned in the order code.
Adjustable pressure setting only on one port, state "-" for the other port.
Example: A-port = 380 bar and B-port = 320 bar: "F= 380/320 bar"
or only A-port = 380 bar: "F= 380/- bar"




xxxxx-BFY
xxxxx-BFY

- Y: Remote control connection on port A and B:
The load pressure signal of each userport can be connected to system safety relief devices, through Ya and Yb (1/4" BSP or SAE 6).
Example: cylinder stroke limiting or overload control function in combination with a 2/2-way valve to tank.



1.

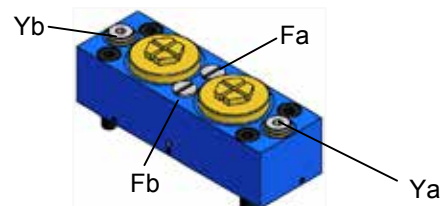

2.

CONTROL VALVE

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code

3. Version with primary and secondary safety functions:

The version with primary and secondary safety functions is a connection block with possibility of three primary safety functions and two secondary safety functions.


Primary safety functions are active at the user port, even if the control section is not operated.

Primary safety functions are available in 3 different types. These types can be used in the same cartridge cavity. A-port as well B-port can be configured as a specific primary safety function.

Code:

LN: Suction valves port A and B


The suction valve per userport prevents cavitation in the user line.



xxxxx-BFLNY
xxxxx-SFLNY

LP: Adjustable port relief on port A and B

Adjustable primary port relief valve prevents the user line against overpressure during operation and also in neutral position. The flow over the relief is maximum 330 l/min. The pressure setting range is 13-420 bar.



xxxxx-BFLPY
xxxxx-SFLPY

Factory pressure setting (first A-port then B-port) has to be mentioned on configuration code.

Adjustable pressure setting only on one port, state "-" for the other port.


Example: A-port = 320 bar and B-port = 280 bar give orderingcode "LPG=320/280"

A-port = 320 bar and B-port = no port relief give orderingcode "LPG=320/-"

LZ: Shock/Suction valves in port A and B

Combined shock/suction valves prevents the user line to relief temporary pressure peaks and prevent cavitation.

Factory pressure setting (first A-port then B-port) has to be mentioned on configuration code. Adjustable pressure setting only on one port, state "-" for the other port.




xxxxx-BFLZY
xxxxx-SFLZY

Example: A-port = 380 bar and B-port = 320 bar: "LZ= 380/320 bar"

or for only A-port = 380 bar: "LZ=380/- bar"

Note:

- If A-port needs LZ-function 280 bar and B-port needs LP-function 280 bar, please note at the connection plate configuration: "LZ=280/-" and "LP= -/280".
- Additional, options "F" and/or "Y" can be configured.

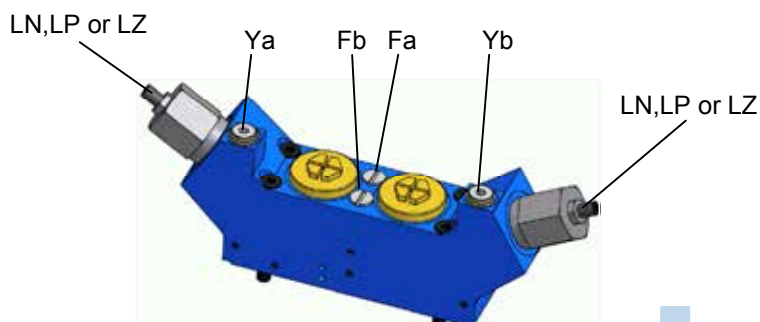

3.

CONTROL VALVE


4. Customized version:



Connection block with 4 LS-reliefs, 2 remote control connection and 2 2/2-way normally closed electrical cartridges.





Connection block for combining the amount of 2 sectional flow's to 1 common SAE-port.
Suction valves or shock/suction valves on A/B possible.

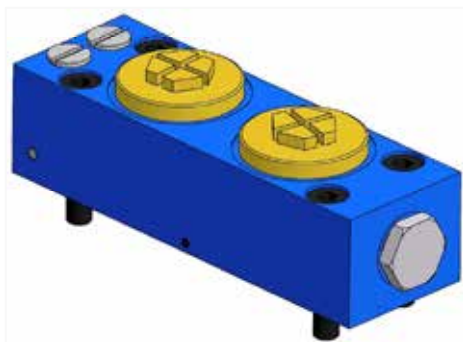

Connection block with LS-reliefs and 1 check valve.

The unique modularity of the APV enables systems solutions for manufacturers of mobile machines, as a wide range of functions can be integrated/changed by the customer in an easy, flexible and cost-effective way.

Some examples are shown below.

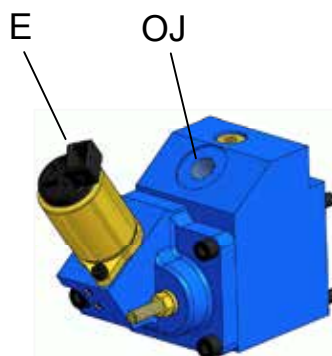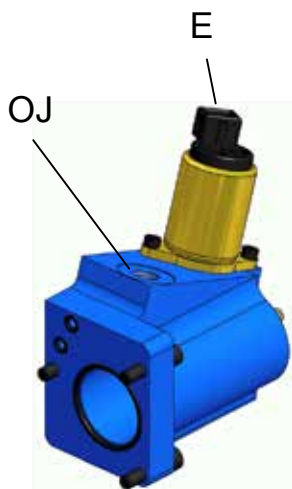

Spring and endcap with double control method electrical and hydraulic proportional.

CONTROL VALVE

Technical data

Inlet plate


Control valve

End plate


Applications

Dimension


Ordering code




Double endcap for common piloting of 2 sections together.



Double springcap for common piloting of 2 sections together.

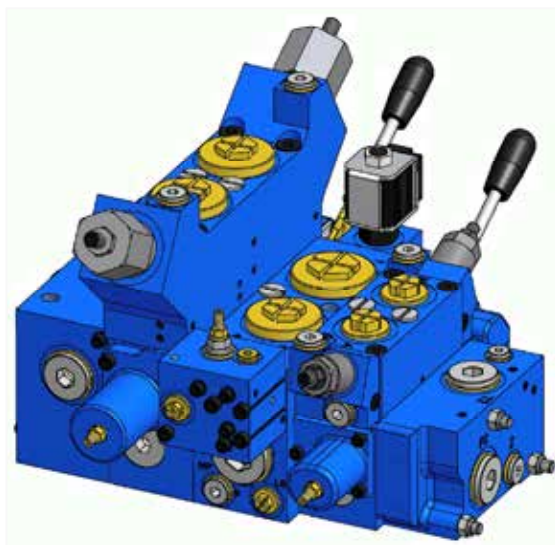

Combination APV-16 and APV-22.

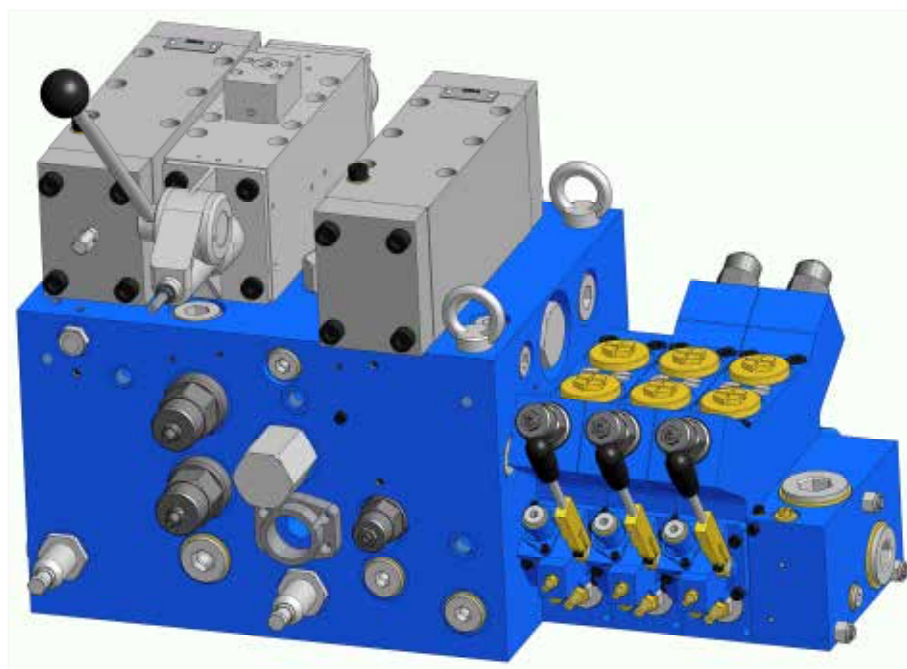



APV-22 valve block added to special size 32 manifold.

END PLATE



Code PH: For control method H or O


End plate for manual or hydraulic operated valves.



Code PJ: For control method E or O

End plate with built-in pressure reducing valve for internal pilot pressure supply of 28 bar to the electrical pilot valves of each electrical proportional control valve or for external pilot pressure supply of 28 bar to the hydraulic joysticks.


Note: The L-connection has to be connected as separate drain to tank.




Code P: With additional P-port

Additional P-port to connect an extra P-line in systems with high pump flow.

22PH/P



22PJ



END PLATE

Technical data

Inlet plate


Control valve

End plate

Applications


Dimension

Ordering code



Code T: With additional T-port


Additional T-port.




Code Z: With Z-port

Z-port to connect the LS-signal of a second valve to the LS-cascade of the first valve , to be able to use the compensator of the first valve.

Note: In systems with a pumpflow > 380l/min use endplate with P2 port (Ordering code 22P...P). For reduction of the return pressure the use of the second tank connection T2 on the end plate is possible (ordering code 22P...T).

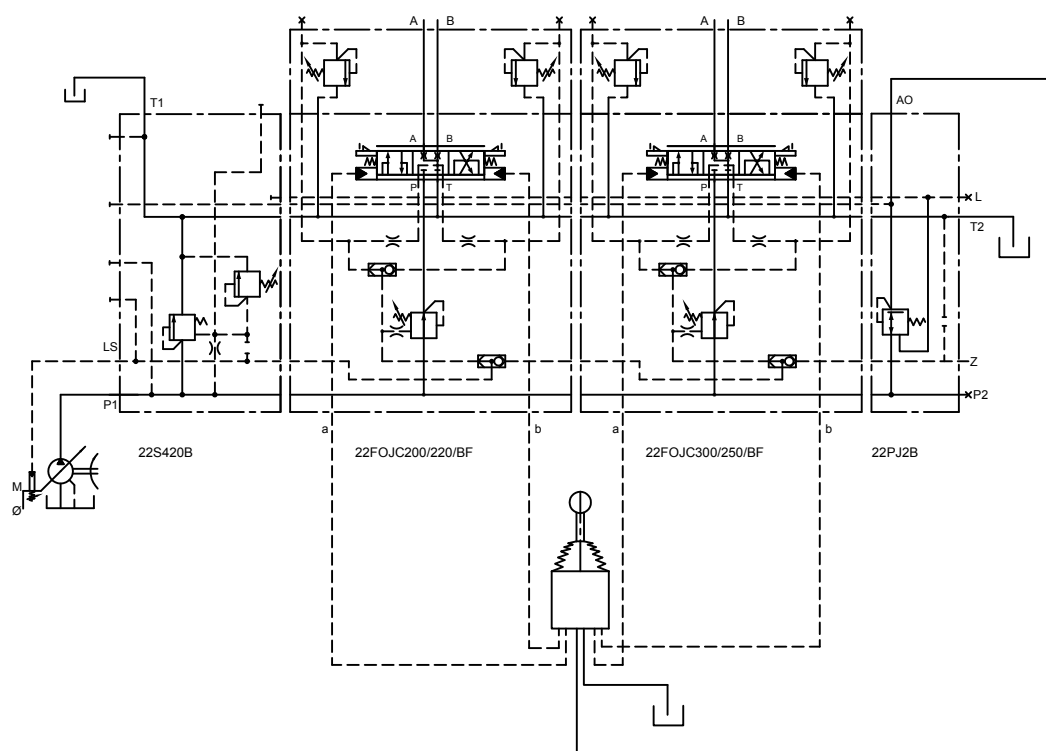

Example inlet plate code U.

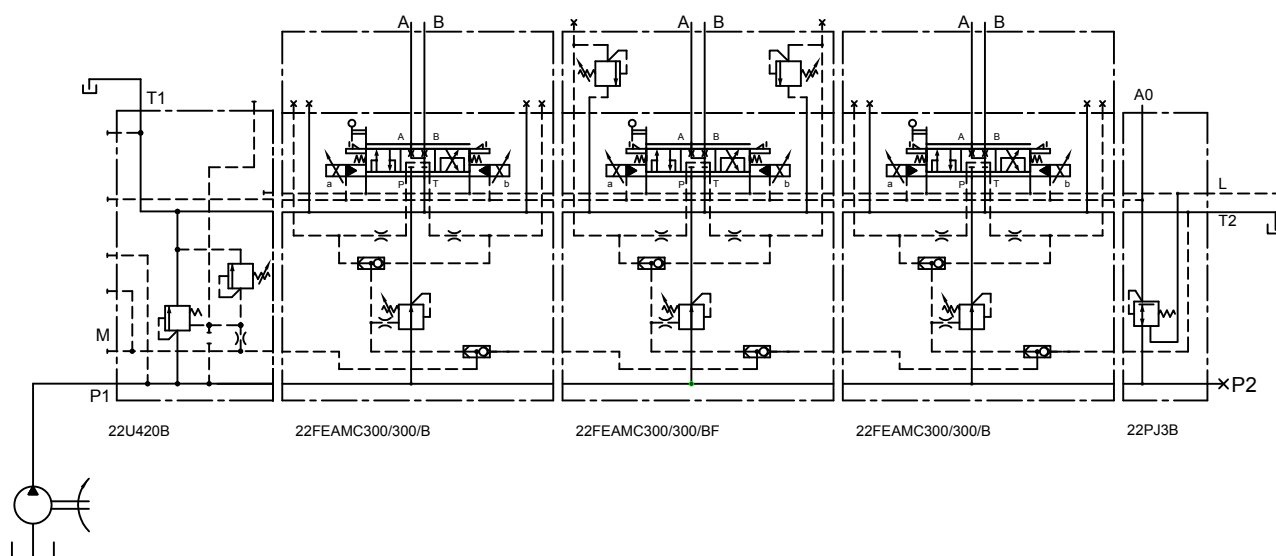


Code U:

Inlet plate for fixed displacement pump: 22U420B

If none of the control sections are in operation, the integrated 3-way compensator of the inlet plate 22U recirculates the flow to tank.


Actuating one of the control sections, the specific load pressure is added as signal to the spring chamber. Actuating more control sections at the same time, the highest load pressure will be added (see shuttle valve cascade system). The maximum load signal pressure is controlled by the max. load pressure relief.

If one or more of the users have to be set on a lower max. pressure, the control section can be configured with pressure reliefs per port (see for example the second section).

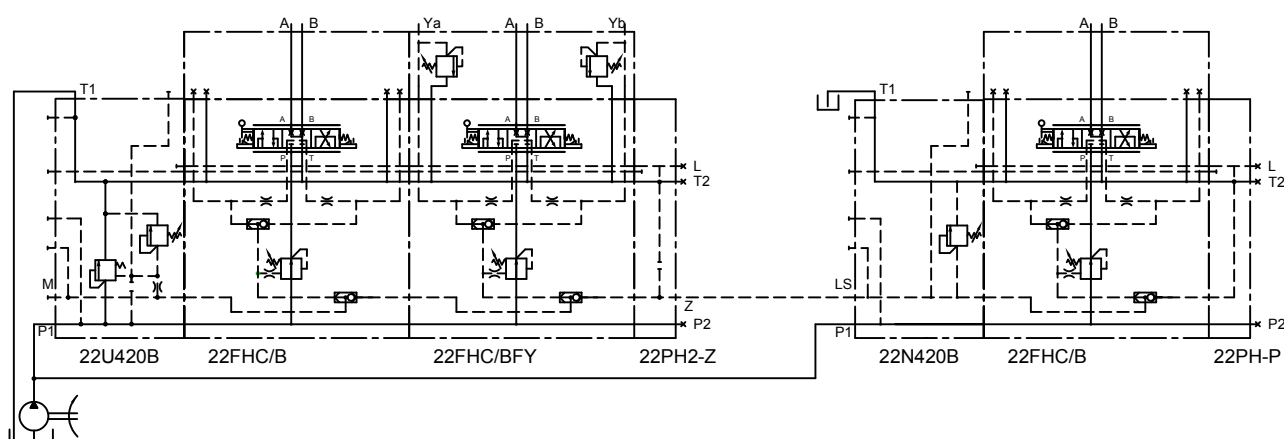

Parallel circuit with fixed displacement pump: 22U and 22N

When two valve blocks should be mounted on different places in a system one valve block can be configured with a 22N inlet plate. The valve block with the 22U is regulating the pump flow and the end plate 22P-Z has to be connected to the LS port of the second valve block with a 22N inlet plate. The max. load pressure relief of the 22N inlet plate has to be adjusted equally or lower as the max. load pressure relief at the main inlet plate 22U.

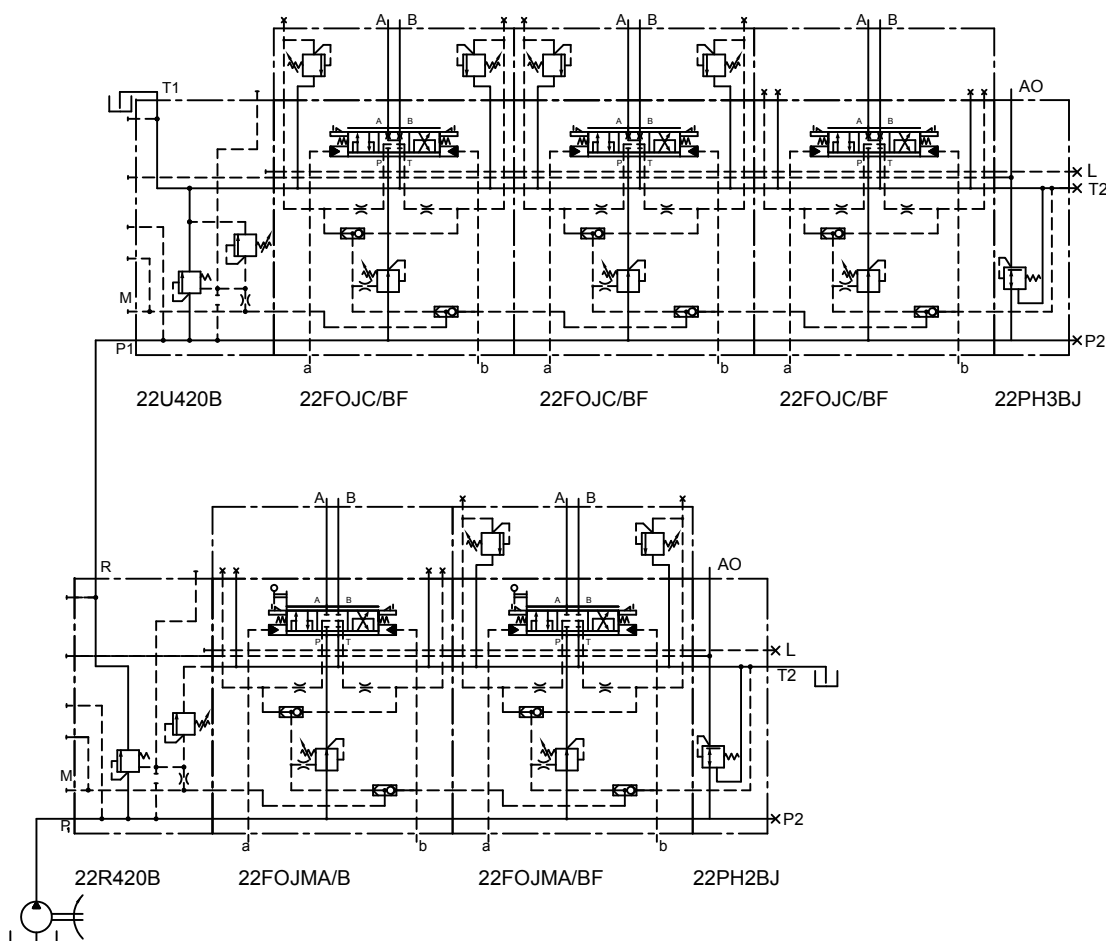


Series circuit with fixed displacement pump: 22U and 22R

For the same condition as the parallel circuit a series circuit can be used. The advantage of a series circuit is that there is not a longer LS signal line that shall give a lower signal under colder conditions.

In the 22R inlet plate the tank circuit is disconnected from the control sections and there is an additional possibility of directing the pump flow from P to R in order to feed another circuit. Please note that with this type of valve block the T2 connection in the end plate has to be connected with tank.

Example inlet plate code N.

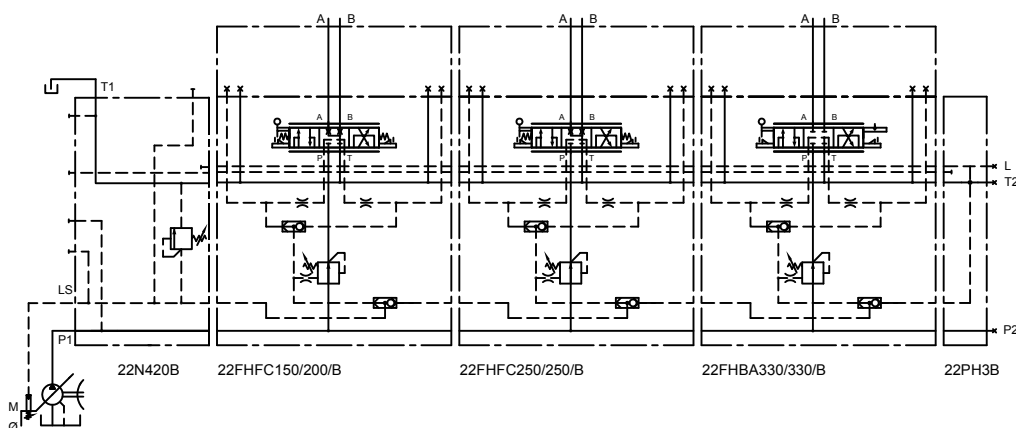


Code N:

Inlet plate for LS-pumps: 22N420B

The version 22N is the inlet plate for the P, T and LS connection.

The adjustable max. pressure relief for the load signal is standard integrated.

Example inlet plate code S.

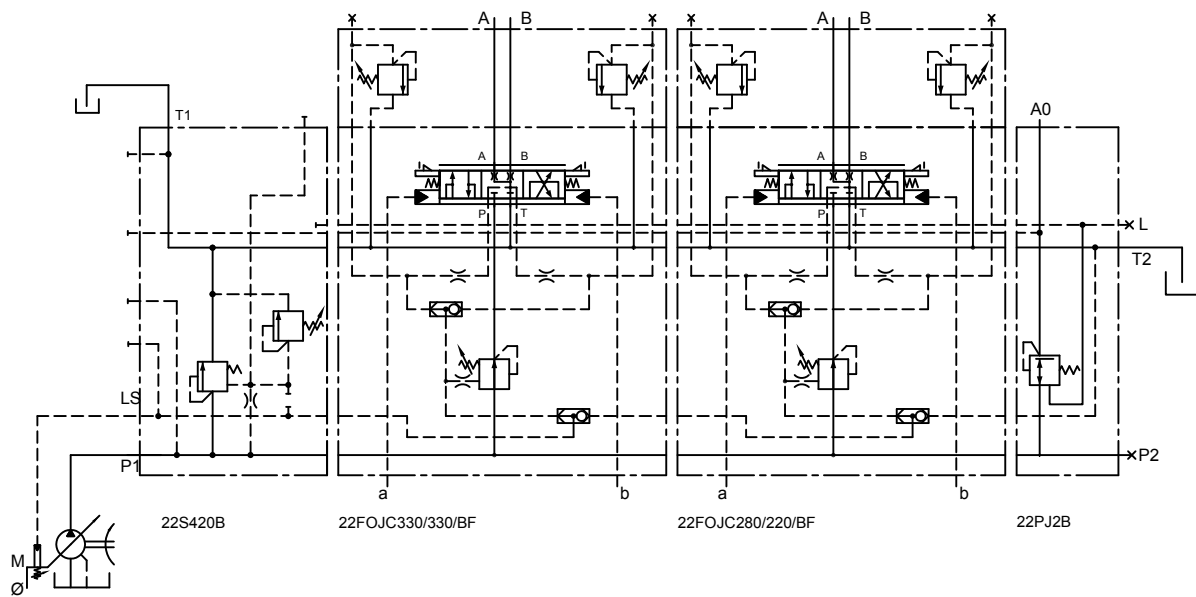



Code S:

Inlet plate for LS-pump: 22S420B

The version 22S has primary overpressure safety function.

The relief valve can be adjusted to max. pumpline pressure and the relief spool reduces the overpressure by relieving the pump flow to tank.

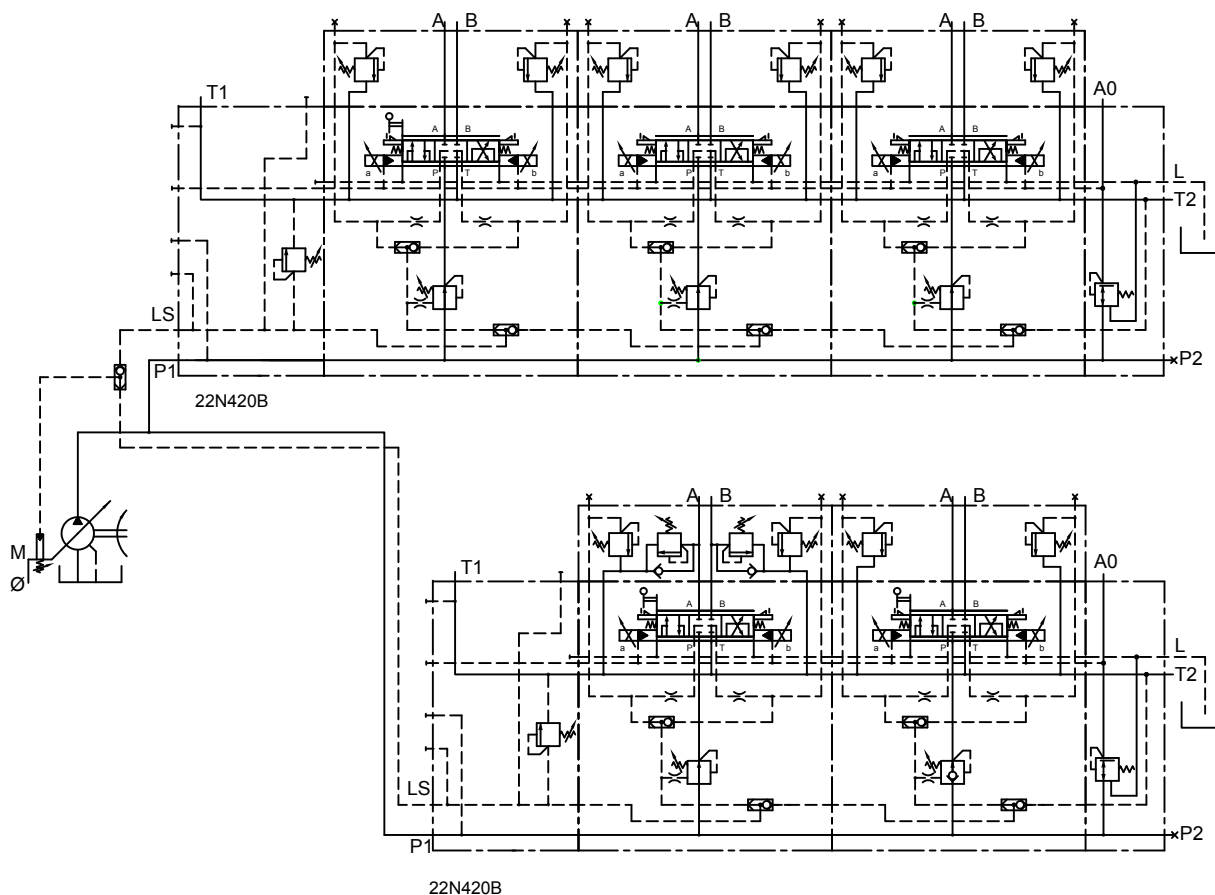

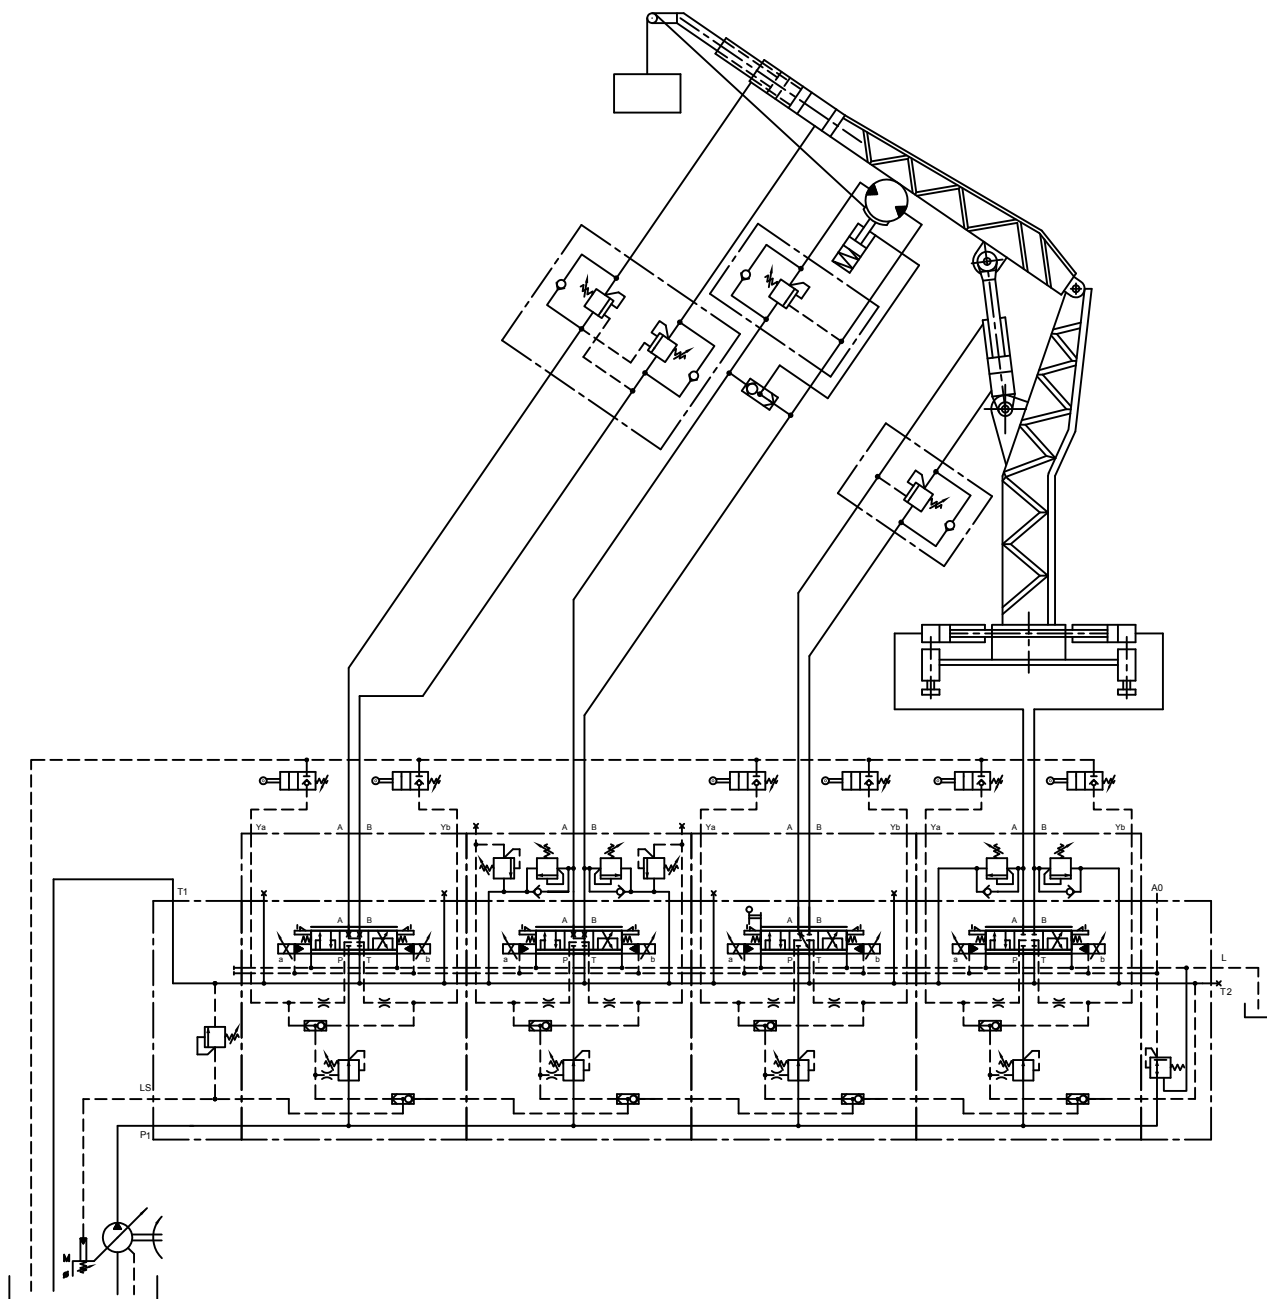

K	In neutral position all ports blocked, A port blended
O	In neutral position all ports blocked, B port blended
For TWIN body only:	
T	TWIN A spool. (2 A spools in 1st section, A in 2nd section)
R	TWIN A spool. (2 A spools)

DIMENSIONS





Connection ports

Max. flow (l/min) (APV-22) A port / B port

1	380
2	330, (660) for TWIN
3	240
4	250, (500) for TWIN
5	150
6	80
7	30, grooved spool only in combination with hand control
-	none

Pre-tension (optional)

-	none
x	20 bar

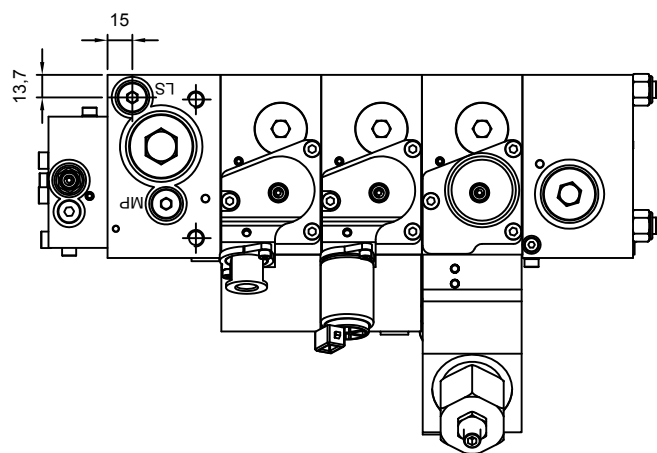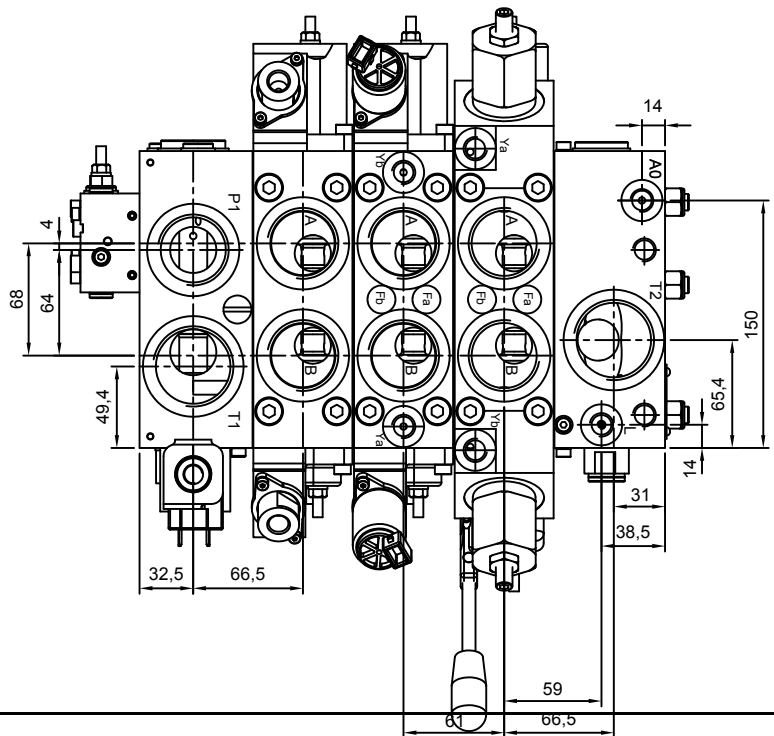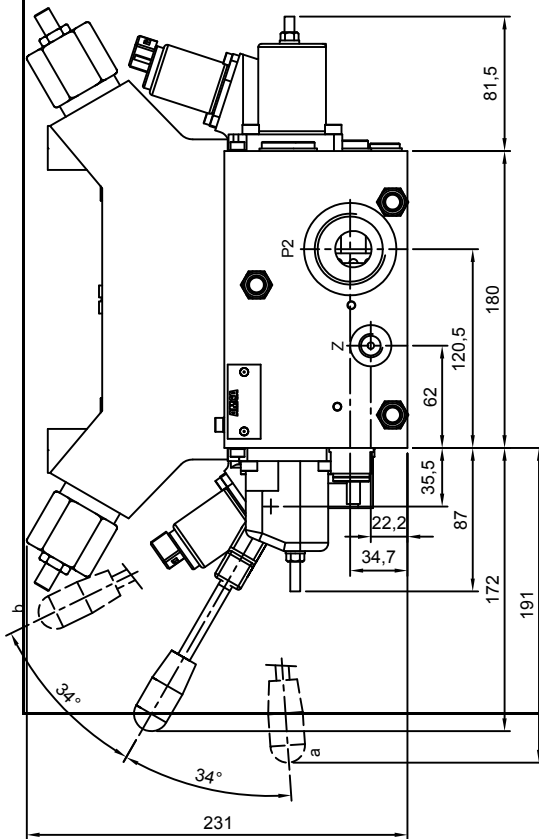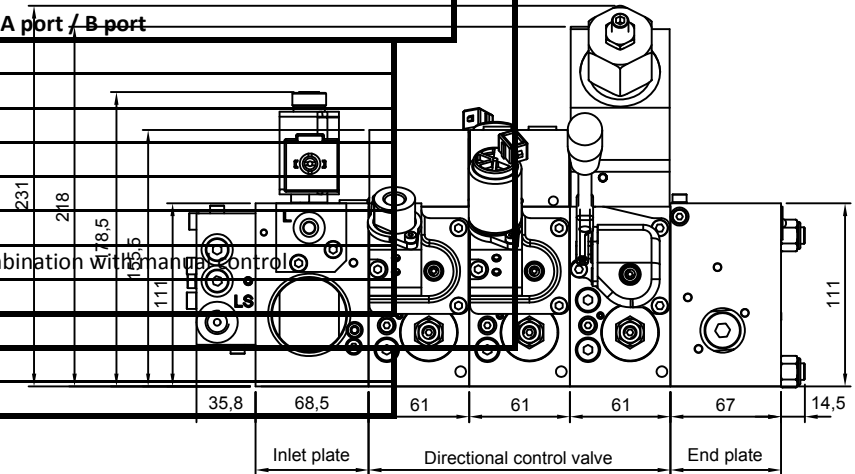

D	TWIN connectionblock SAE ORB	
E	TWIN connectionblock code 61 SAE 1" flange	** only on request

Connection block body

DIMENSIONS

L1	For shock / suction Z1, P1, 2,3 and N1 with 'Y' port Lsa/b included
Mounting holes M14x17	for relief in common signal Lsa Lsb
D2	for dump or Elec prop relief in Lsa and Lsb
-	none

LS pressure setting range

E	A and B < 100 bar
F	A and B > 100 bar
G	A > 100 bar B < 100 bar
H	A < 100 bar B > 100 bar

Cartridge A-side / B side

Z1	shock suction	only with body:
N1	suction	S L1
P1	shock	B/S L1
XX	dummy	B/S L1
ZC	shock suction for TWIN	CL1
NC	suction for TWIN	CL1
PC	shock for TWIN	CL1


CARTRIDGES NOG VERDER JIJ TE KRIJGEN

Oring type

-	BUNA N (standard)
I	VITON
H	HNBR

Surface treatment

-	none (standard)
A	Protalloy

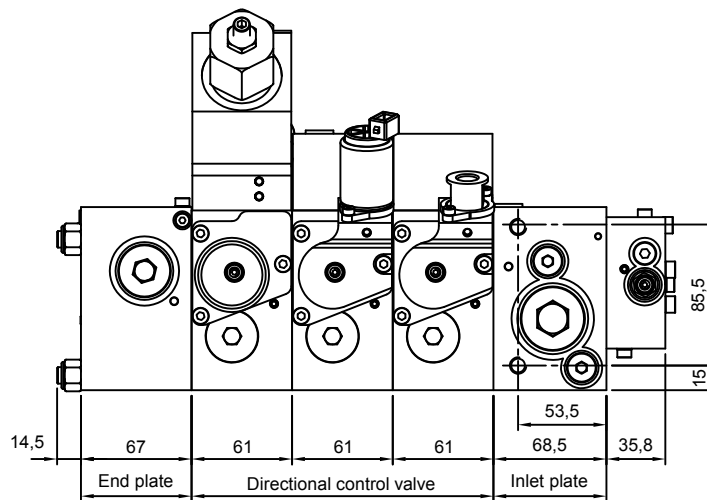

Weight:	N
Inlet plate	
22N	84
22U/S/R	85
Opt. D/E	7,5
Opt. A/L	12
Spool section	
22FE*	87
22FE*M	89
22FH	88
22FOJ	85
22FOJM	88

Weight:	N
Connection block	
B	30
BFY	32
BFLZY	65
End plate	
22PH	83
22PJ	83

Weight assembly kit:	N
with 1 control valve	2,91
with 2 control valve	3,57
with 3 control valve	4,23
with 4 control valve	4,89
with 5 control valve	5,55
with 6 control valve	6,21
with 7 control valve	6,87
with 8 control valve	7,53
with 9 control valve	8,19
with 10 control valve	8,85

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code

DIMENSIONS

Connection ports





	BSP	SAE ORB
P1	: 1 1/4"	20
T1	: 1 1/2"	24
LS	: 1/4"	6
Ya,Yb	: 1/4"	6
A0	: 1/4"	6
Z	: 1/4"	6

APV-22

A,B	: 1 1/4"	20
T2	: 1 1/2"	24
L	: 1/4"	6



APV-16

A,B	: 3/4"	12
T2	: 3/4"	12
L	: 1/8"	4

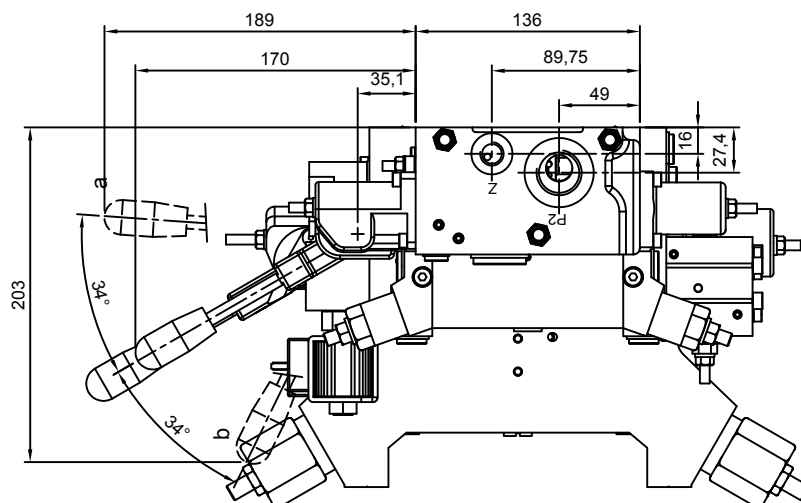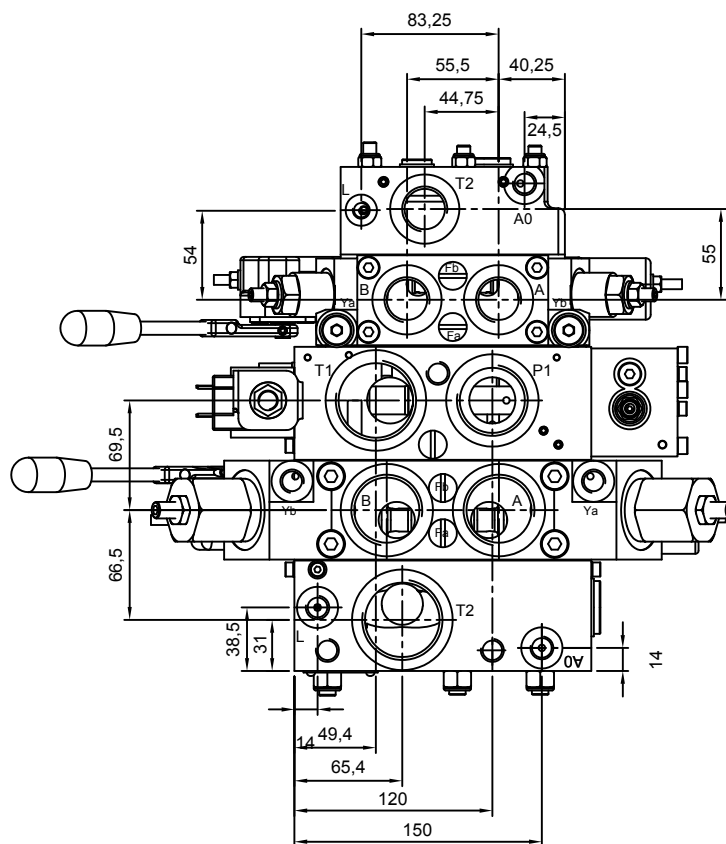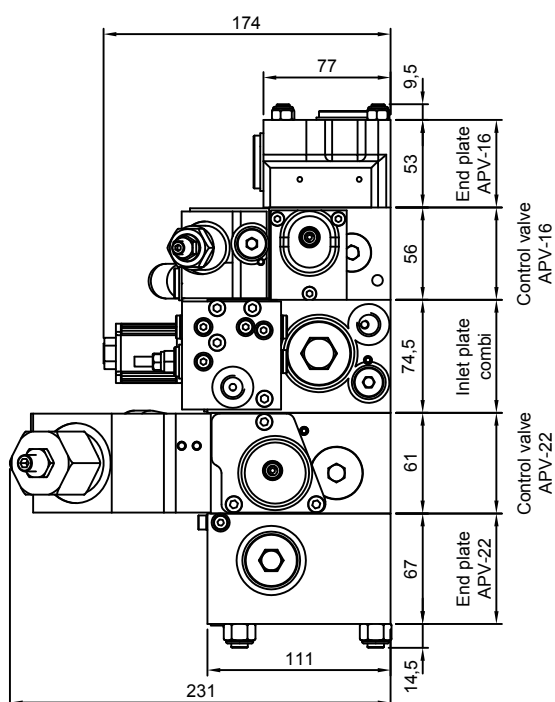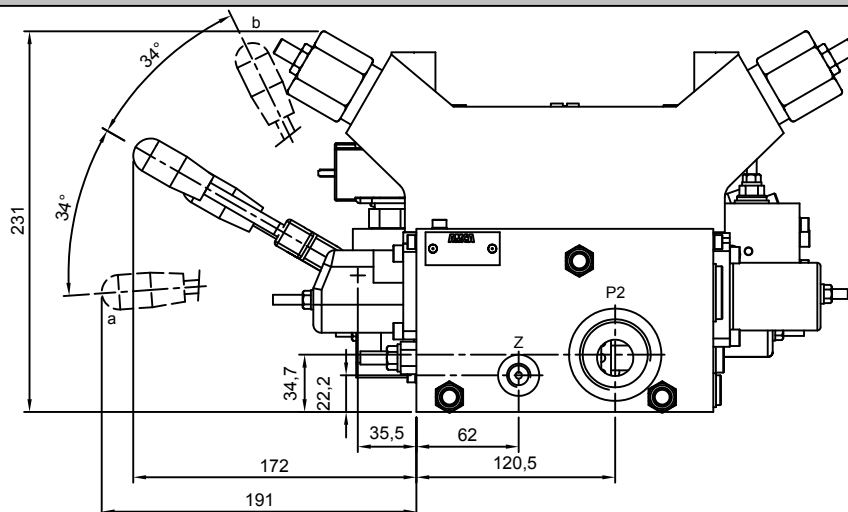

DIMENSIONS

Mounting holes APV-22: M14 x 17
 Mounting holes APV-16: M8 x 12

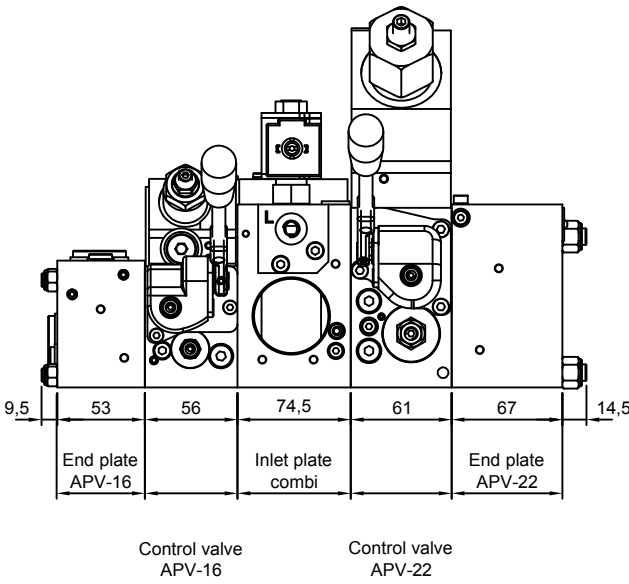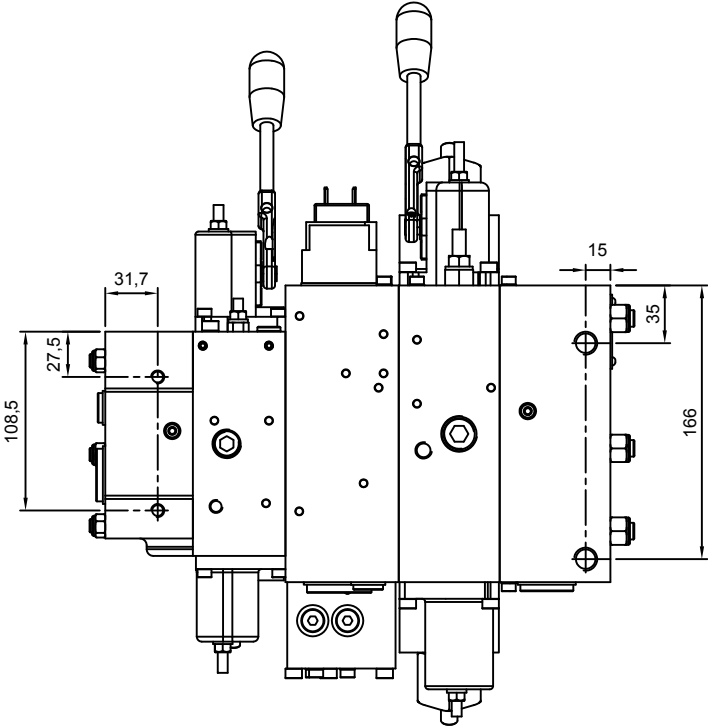

Technical data

Inlet plate

Control valve

End plate

Applications

Dimension

Ordering code

CONFIGURATION CODE

INLET PLATE

		22	K	-	S	420	B	-	A	O	B	-	-
Size													
22	22												
Build type													
K	Sandwich												
A	Subplate												
body type													
C	Combi inlet APV-22/16 type												
-	standard APV-22 type												
Plate version													
U	For fixed displacement pump												
UH	For fixed displacement pump, high flow > 100 l/min												
S	For LS-pump and max. pressure valve in P												
N	For S-pump and LS safety valve												
R	For fixed displacement pump and serial connection												
RH	For fixed displacement pump and serial connection High flow												
Pressure adjustment in bar													
100	Max 100 bar												
420	Max 420 bar												
Port connections													
B	P&T thread in BSP												
S	P&T thread in SAE ORB												
A	SAE Flanges												
combi options													
C	Combi inlet APV-22/16 type												
-													
Side options LS													
A	Anti saturation function												
L	LS Amplifier												
AL	Anti saturation function / LS amplifier combined												
-	none												
Side options LS													
O	Pump unloading function, normally open												
C	Pump unloading function: normally closed												
E	prop pressure relief increase current, increase pressure												
F	prop pressure relief increase current, decrease pressure												
-	none												
Actuation													
A	12 VDC												
B	24 VDC												
H	Manual												
-	none												
Oring type													
-	BUNA N												
I	VITON												
H	HNBR												
Surface treatment													
-	none												
A	Protalloy												

CONFIGURATION CODE

CONTROL VALVE

PART: SPOOL SECTION

		22	K	F1	S	H	E	B	A	M
Size										
22	22									
Bild type										
K	Sandwich									
A	Subplate									
Compensator										
F	With compensator									
N	No compensator									
P	Dummy Plate 1 section									
Q	Dummy plate 1/2 section									
1	Check valve function									
-	none									
Body type										
S	Standard body type									
H	high flow standard body type (low ΔP)									
V	1,5 section wide body type for easy mounting									
W	high flow 1,5 section wide body type for easy mounting									
C	TWIN body type : 2 sections standard body type									
Compensator spring										
S	standard flow compensator spring									
L	Low flow compensator spring									
H	High flow compensator spring									
Control body										
E	Suitable for electric or hydraulic control 4/3 version									
F	Suitable for electric or hydraulic control 4/2 version									
J	for electric and hydraulic control combined 1/4" BSP									
I	for electric and hydraulic control combined SAE ORB 6									
H	Manual control									
	For TWIN body only:									
C	Suitable for electric or hydraulic control, Combined (pilot) control									
D	Suitable for electric or hydraulic control, Dual (pilot) control									
Actuating type										
B	24VDC									
F	24VDC with pin									
A	12VDC									
E	12VDC with pin									
H	24VDC with II 2G Ex mb II T4, flying leed									
O	Hydraulic control 1/4" BSP									
P	Hydraulic control SAE ORB 6									
	only in combination with manual control (H)									
F	spring return									
B	friction brake									
R	3 position detent									
Connector type										
A	Amp junior connector									
D	Deutsch connector**									
-										
M	Additional manual control with E/O									

CONFIGURATION CODE

CONTROL VALVE

PART: SPOOL SECTION

		C	2- / 2-
Main spool type			
A	all ports blocked in neutral		
B	B port blocked in neutral, A port throttled to tank (20%)		
C	A&B to tank in neutral (20% of nominal flow)		
D	A port blocked in neutral, B port throttled to tank (20%)		
G	In neutral position port A + B throttled flow to T (20%)		
K	In neutral position all ports blocked, A port blended		
O	In neutral position all ports blocked, B port blended		
For TWIN body only:			
Q	TWIN C spool, (C in 1st section, A in 2nd section)		
R	TWIN A spool. (2 A spools)		
Max. flow (l/min) (APV-22) A port / B port			
1	380		
2	330, (660) for TWIN		
3	300		
4	250, (500) for TWIN		
5	150		
6	80		
7	30, grooved spool only in combination with manual control		
-	none		
Pre-tension (optional)			
-	none		
x	20 bar		

CONFIGURATION CODE

CONTROL VALVE

PART: CONNECTION BLOCK

		B	FY	F	/	Z1	/	Z1	-	-
Port connections										
B	Thread in BSP									
S	Thread in SAE ORB									
A	code 61 SAE 1" flanges									
C	TWIN connectionblock 1,5" BSP									
D	TWIN connectionblock SAE ORB									
E	TWIN connectionblock code 61 SAE 1" flange ** only on request									
Connection block body										
FY	Lsa/Lsb + Y ports									
L1	For shock / suction Z1, P1 ,2,3 and N1 with 'Y' port Lsa/b included									
D1	for dump or Elec prop relief in common signal Lsa Lsb									
D2	for dump or Elec prop relief in Lsa and Lsb									
-	none									
LS pressure setting range										
E	A and B < 100 bar									
F	A and B > 100 bar									
G	A > 100 bar B < 100 bar									
H	A < 100 bar B > 100 bar									
Cartridge A-side / B side		only with body:								
Z1	shock suction									S L1
N1	suction									B/S L1
P1	shock									B/S L1
XX	dummy									B/S L1
ZC	shock suction for TWIN									CL1
NC	suction for TWIN									CL1
PC	shock for TWIN									CL1
CARTRIDGES NOG VERDER UIT TE BREIDEN										
Oring type										
-	BUNA N (standard)									
I	VITON									
H	HNBR									
Surface treatment										
-	none (standard)									
A	Protalloy									

CONFIGURATION CODE

END PLATE

		16	K	PJ	Z	B	3	-	-
Size									
22	22								
Bild type									
K	Sandwich								
A	Subplate								
plate version									
PH	For manual control only including P2 & T2								
PJ	For Electrical control including P2 & T2								
PC	For use with combi inlet and electric operation								
variants									
Z	for LS signal from other valve								
Port connections									
B	Thread in BSP								
S	Thread in SAE ORB								
A	SAE flanges								
Tie Rod kit Length									
1--10,5	Amount of sections (count V and W sections for 1,5)								
Oring type									
-	BUNA N (standard)								
I	VITON								
H	HNBR								
Surface treatment									
-	none (standard)								
A	Protalloy								



AMCA Hydraulic Fluid Power BV

B. Kuiperweg 33
9792 PJ Ten Post
The Netherlands

P.O. Box 18
9790 AA Ten Boer
The Netherlands

Tel.: +31 (0)50-3023577

Fax: +31(0)50-3021226

sales@amca-nl.com

www.amca-nl.com

